


## “Observer 100” Series Pedestal Alarm

### Features & Benefits


- NEMA 3R Thermoplastic Enclosure
- Available with 115V or 230V Outlet
- Large 360° Red Alarm Lens
- Audible Horn rated 85db @ 10'
- Standard External Test-Normal-Silence Switch
- Available with Over Current Protection
- Available Remote Alarm
- Automatic Alarm Reset
- Auxiliary Dry Contacts
- 9-volt Battery Audible Alarm Back-up (battery not included)
- Quick Connect Block for Alarm Float
- Includes 15' Mechanical Alarm Float & mounting tie strap
- Two Year Limited Warranty
- Available in both High Water & Low Level Alarm versions

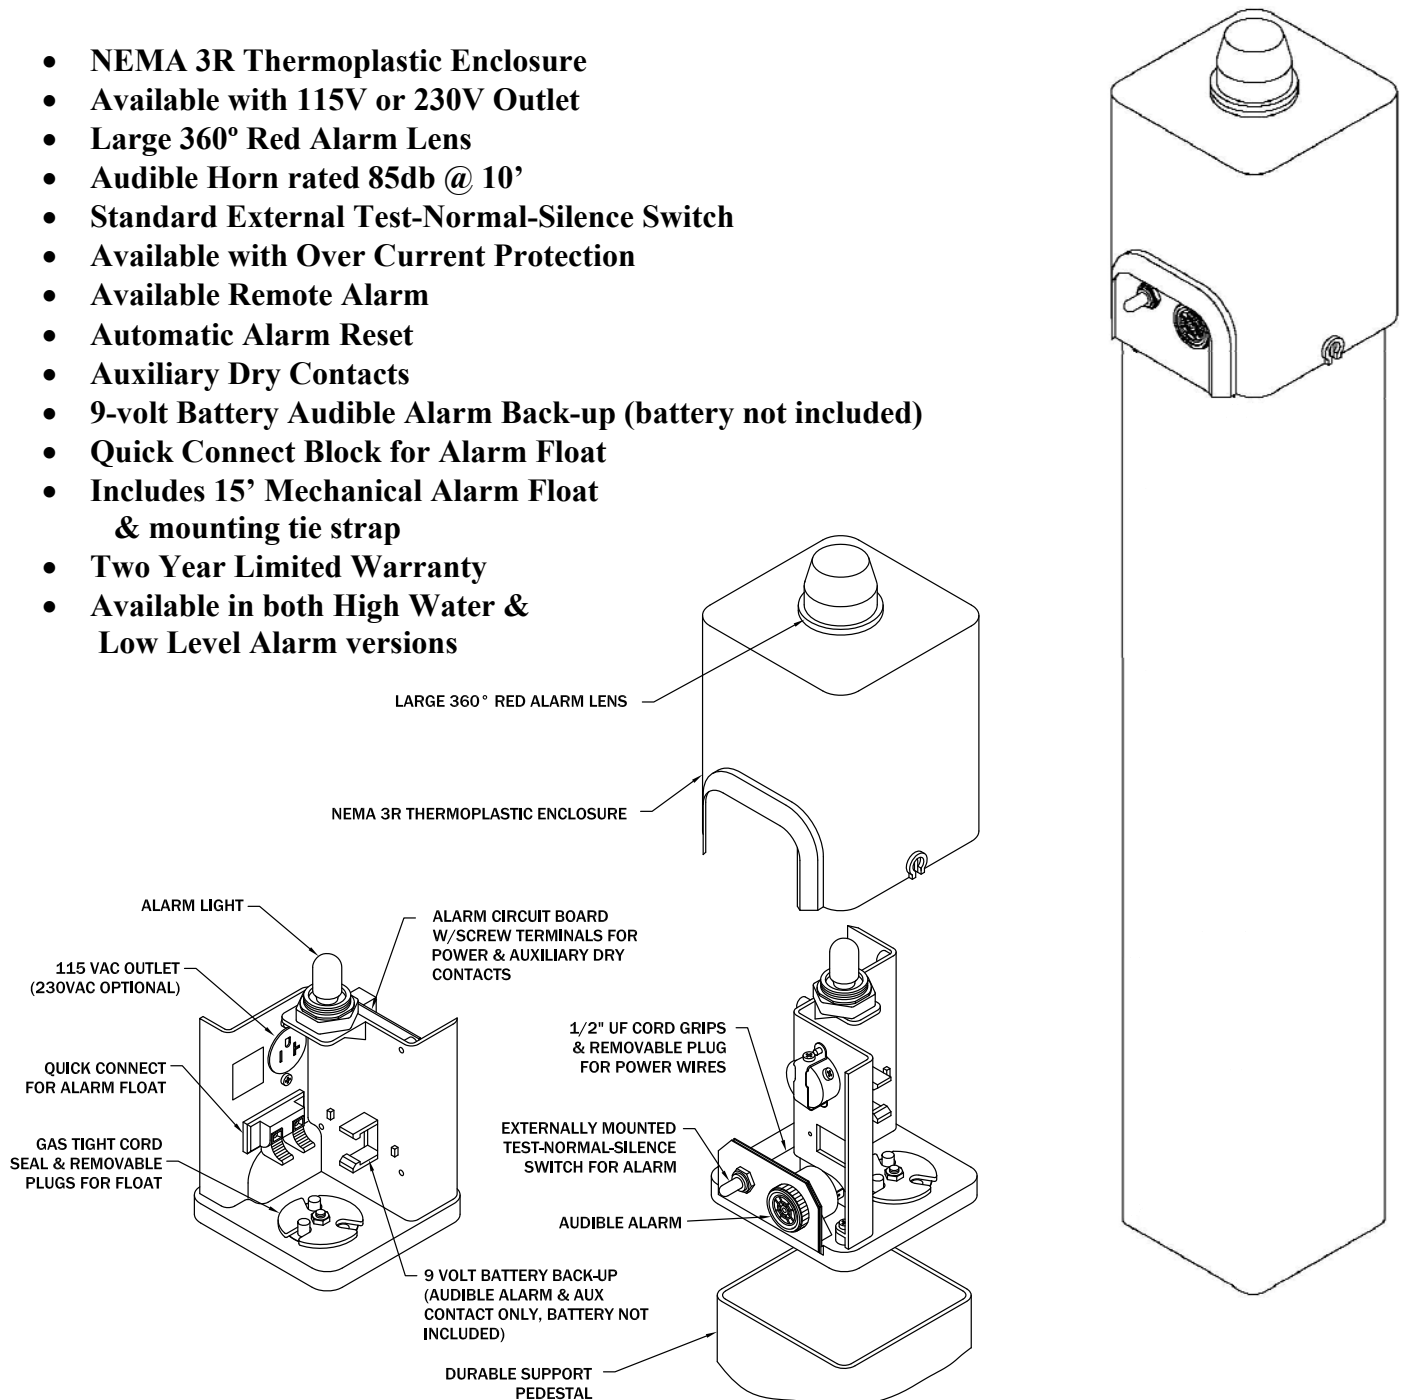

\*Note: Consult the factory for other available options.

## **“Observer 100” Series Pedestal Alarm**

### **Wiring Diagram**

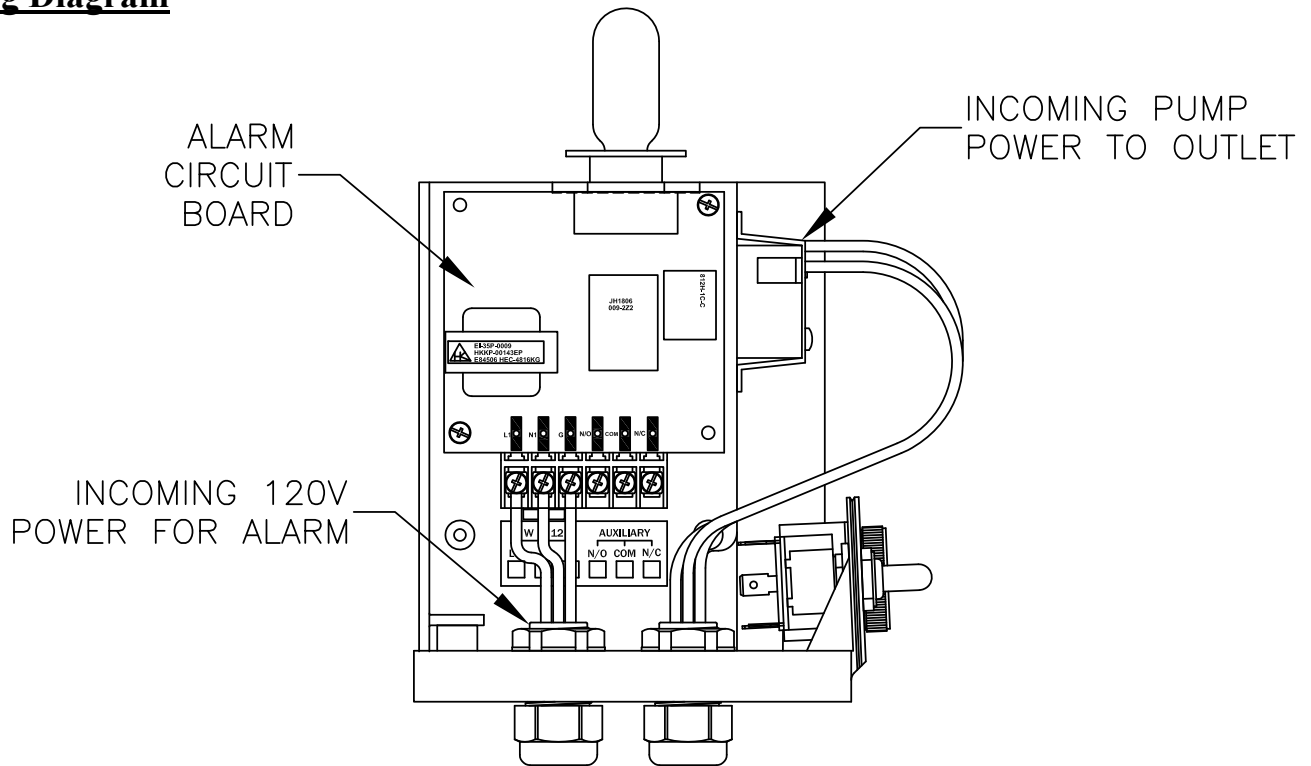

**NOTES:** Two separate power supplies are recommended – one for the alarm circuit and one for the pump circuit. On the 120VAC outlet – wires connect screw terminals. If using ring or fork terminals, size them to appropriately fit #8-32 threaded screws. When using Auxiliary contacts, contact load must not exceed 3 amps. Add a cord grip appropriate to seal the conductors at your point of entry into the enclosure. “COM” connects to voltage. “NO” should be connected to devices that must operate while in an alarm state (IE: a remote mounted alarm light. Most applications will require the “normally open” contact.) Other devices may require inverted logic and should connect to “NC.”