


MODEL NO.

C6C7-WG20-21

INCOMING POWER  
CONNECTIONS

PAGE  
1


TIGHTENING TORQUE: 16 IN-LBS

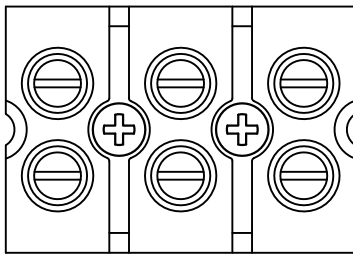

**N L1 L2**  
**INC. 230VAC-1PH**

FLOAT & PUMP CONNECTIONS

TIGHTENING TORQUE IS 16 in-lbs.

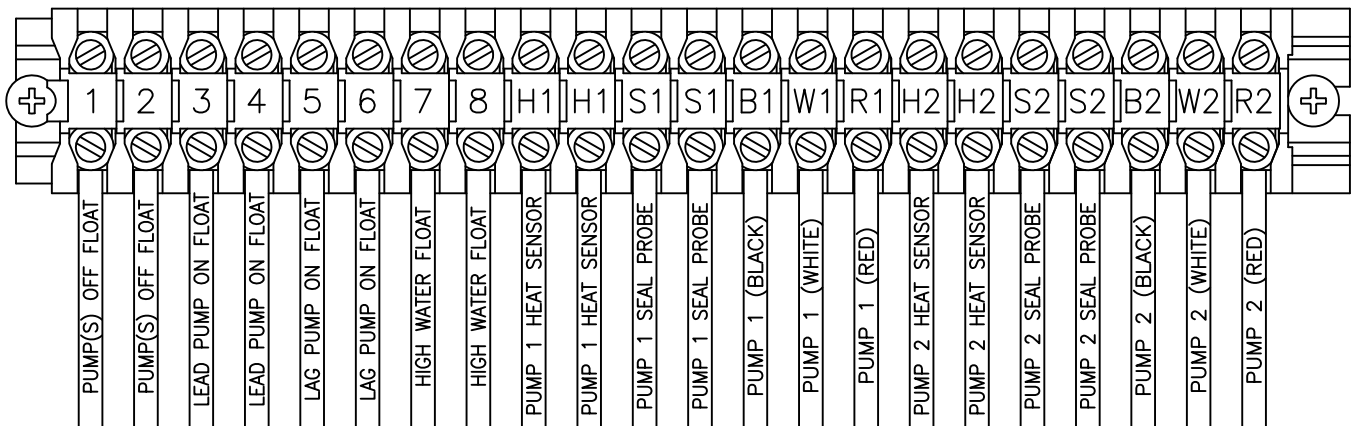


CHANGES		TOLERANCES		DRAWN BY		DATE		POWER CONNECTION DIAGRAM DUPLEX			
F		DECIMALS .XXX = ±.005 .XX = ±.010 FRACTIONAL X/X = ±1/64 ANGLES X° = ±1/2°		D. MIDDLETON		09/01/15					
E				MATERIAL SPECIFICATION:  AS NOTED				SCALE: PART NO.			
D								FULL		50A750	
C											
B											
A											

POWER CIRCUIT  
230V - 1PH

PUMP MOTORS MUST HAVE INTERNAL OVERLOAD PROTECTION.

MODEL NO.  
C6C7-WG20-21

PAGE  
2

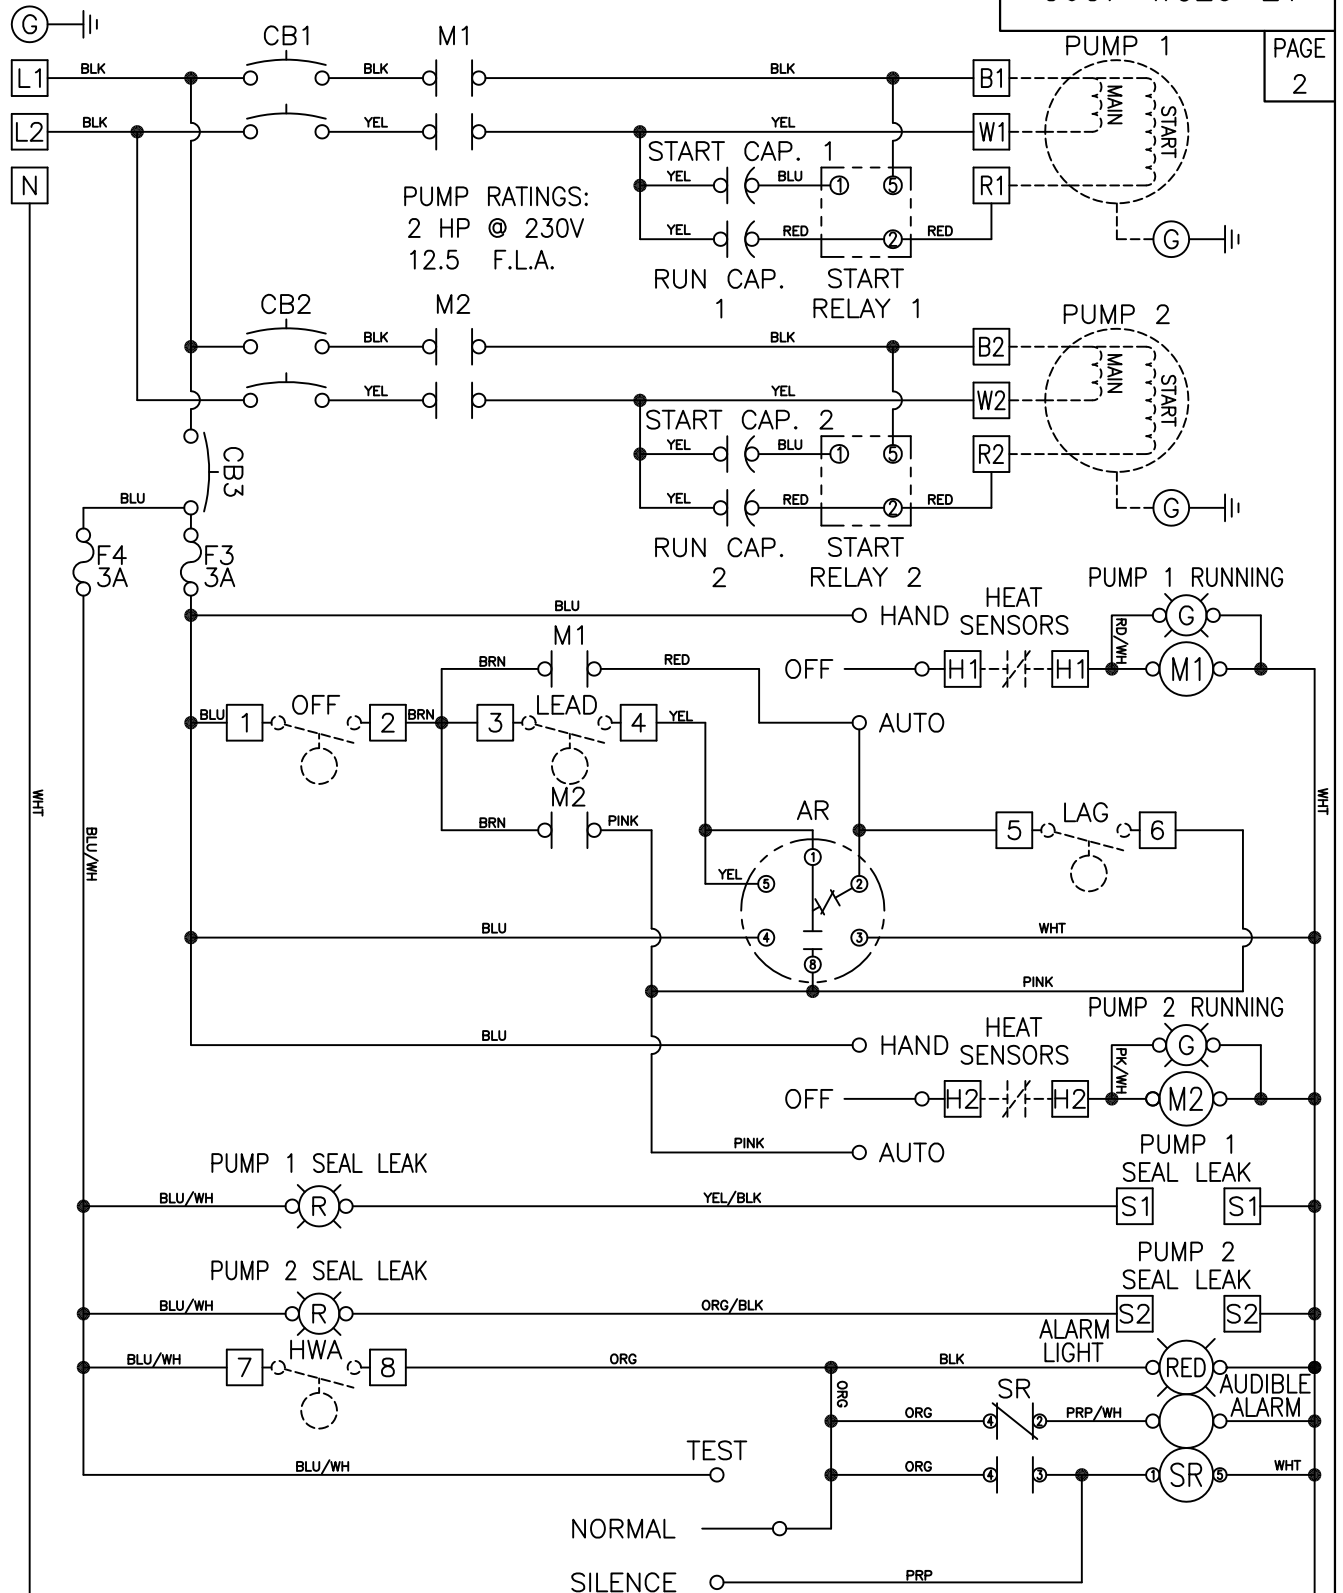

NOTES: FLOAT SWITCH TO BE RATED 2 AMP AT 120V MINIMUM.  
MAIN PANEL DISCONNECT MUST BE PROVIDED BY INSTALLER.  
DASHED LINES INDICATE ITEMS NOT CONTAIN IN THE PANEL.  
REQUIRED TORQUE FOR TERMINAL BLOCK SCREWS IS 16 in.-lbs.  
FIELD WIRING MUST BE A MINIMUM OF 60°C COPPER WIRE.



CHANGES	TOLERANCES
F	DECIMALS
E	.XXX = ±.005
D	.XX = ±.010
C	FRACTIONAL
B	X/X = ±.1/64
A	ANGLES
	X° = ±1/2°

CHANGES	TOLERANCES
F	DECIMALS
E	.XXX = ±.005
D	.XX = ±.010
C	FRACTIONAL
B	X/X = ±.1/64
A	ANGLES
	X° = ±1/2°

DRAWN BY	DATE
D. MIDDLETON	09/02/15
MATERIAL SPECIFICATION:	
AS NOTED	

SCHEMATIC, ELECTRICAL  
DUPLX GRINDER

SCALE: PART NO.

FULL

50A750