

POWER CONNECTIONS


MODEL NO.

GRDDUP

TIGHTENING TORQUE FOR TERMINAL BLOCK IS 16 in-lbs.


PAGE

1

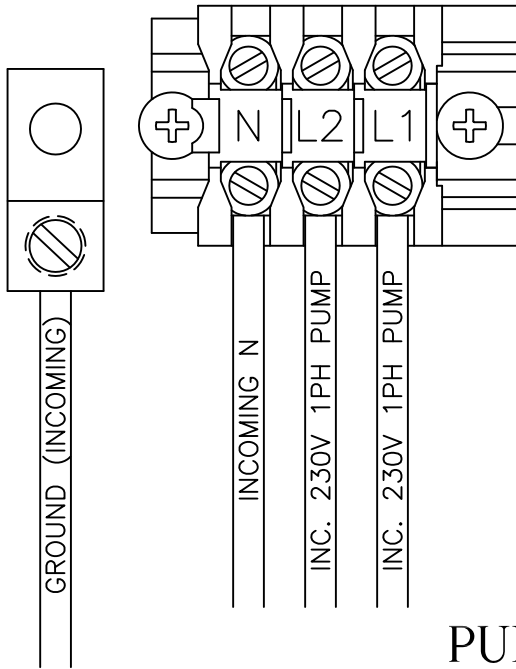

PUMP & FLOAT CONNECTIONS

TIGHTENING TORQUE FOR TERMINAL BLOCK IS 16 in-lbs.

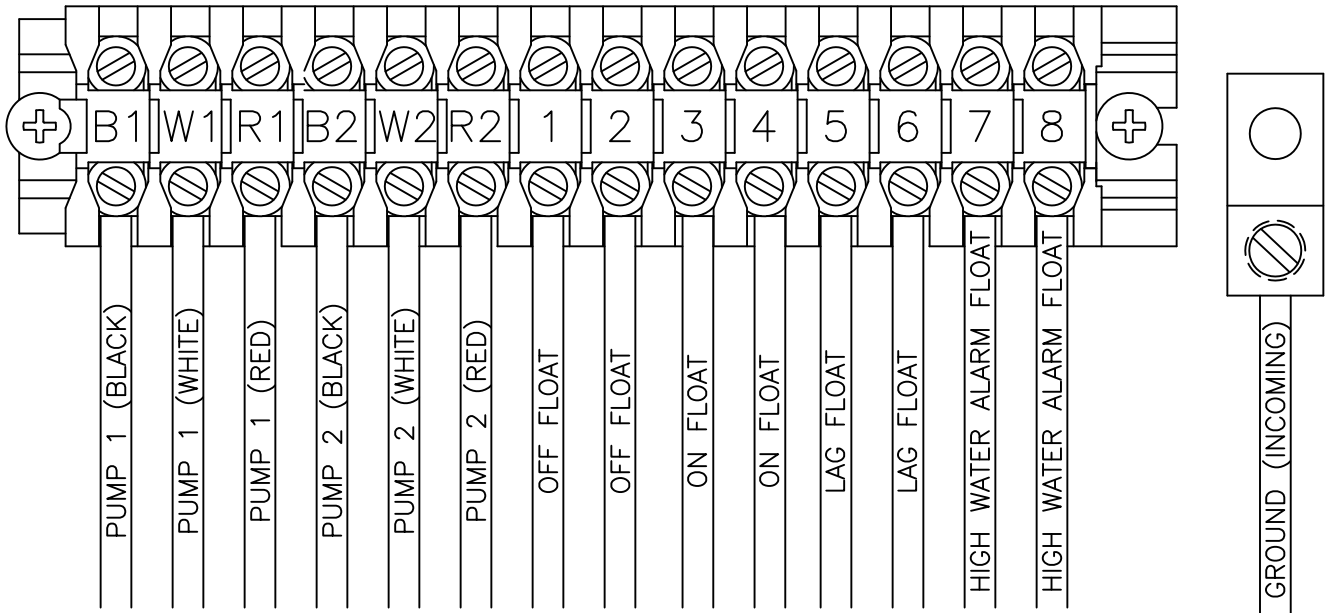

ALL INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY TO SEPTIC PRODUCTS INC.




CHANGES	TOLERANCES	DRAWN BY	DATE
F	DECIMALS .xxx = ±.005	C. BARRICK	10/06/09
E	.xx = ±.010	MATERIAL SPECIFICATION: AS NOTED	
D	FRACTIONAL x/x = ±.1/64		
C	ANGLES x° = ±1/2°		
B			
A			


POWER CONNECTION DIAGRAM SIMPLEX(230V)	
SCALE:	PART NO.
FULL	50A750

POWER CIRCUIT
230V - 1PH

PUMP MOTORS MUST HAVE INTERNAL OVERLOAD PROTECTION.

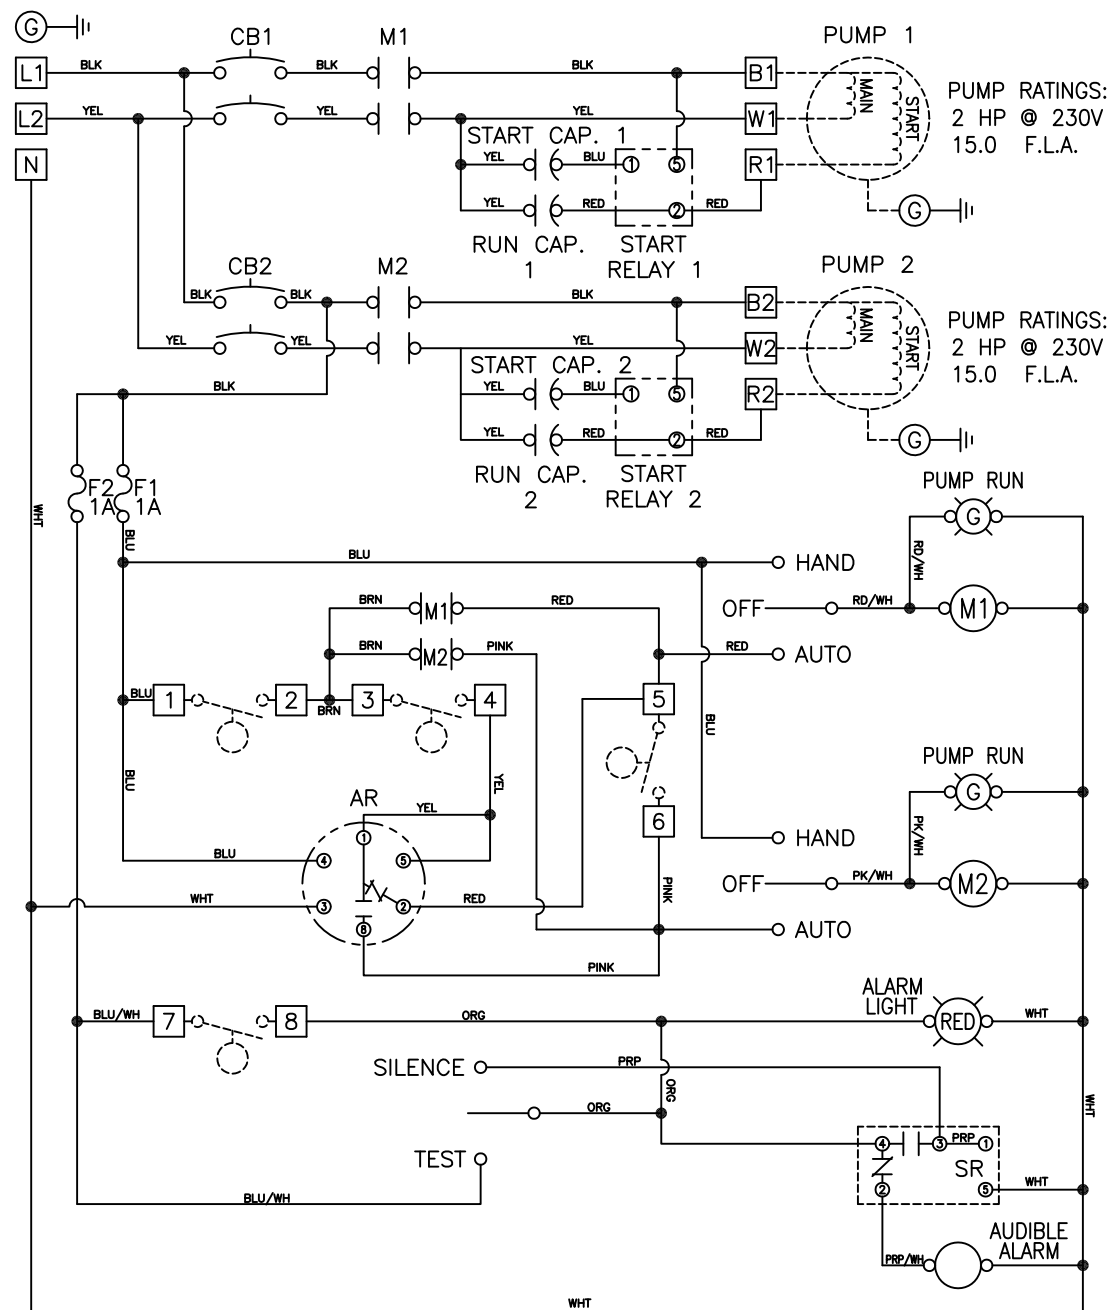

NOTES: FLOAT SWITCH TO BE RATED 2 AMP AT 120V MINIMUM.
 MAIN PANEL DISCONNECT MUST BE PROVIDED BY INSTALLER.
 DASHED LINES INDICATE ITEMS NOT CONTAINED IN THE PANEL.
 REQUIRED TORQUE FOR TERMINAL BLOCK SCREWS IS 16 in-lbs.
 FIELD WIRING MUST BE A MINIMUM OF 60°C COPPER WIRE.



SEPTIC PRODUCTS INC

SCHEMATIC, ELECTRICAL DUPLIX GRINDER	
SCALE: PART NO.	FULL 50A750

CHANGES	TOLERANCES	DRAWN BY	DATE
F	DECIMALS .xxx = ±.005 .xx = ±.010	C. BARRICK	10/06/09
E	FRACTIONAL x/x = ±.1/64 ANGLES x° = ±1/2°	MATERIAL SPECIFICATION: AS NOTED	
D			
C			
B			
A			