




“C16-WIFI” IOT-enabled Alarm

Features & Benefits


- Primary voltage: 115VAC, Secondary voltage: 5VDC
- Remote notification of alarm situation via email/text over internet connection *
- Support for up to 4 contacts
- Rechargeable battery backup (NOTE: not plugged in prior to shipping for safety)
- May connect to WiFi or hard-wired LAN networks
- Configure settings via smartphone or web browser
- No third-party service contracts required (SMS/text messaging fees may apply)

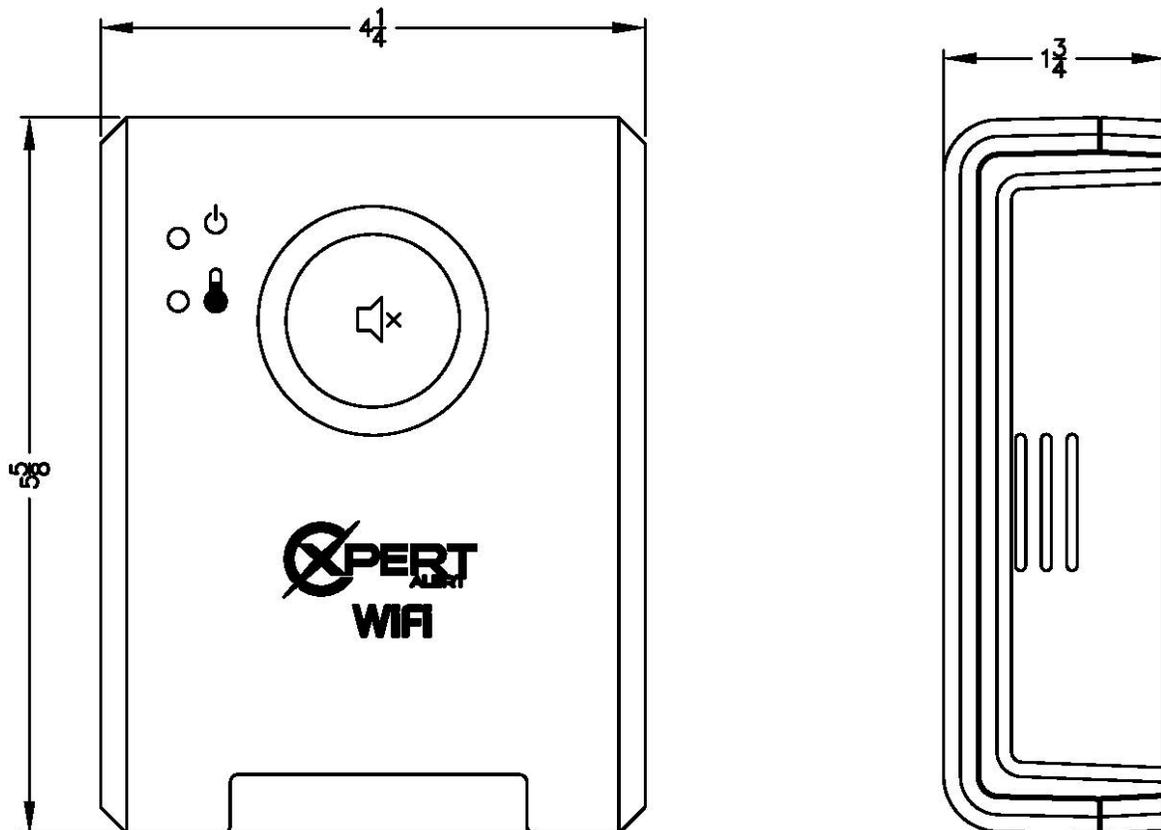

* Note: Support for up to 2 input circuits. Consult the factory for available configurations. Standard configuration assumes high-water-alarm, power loss, and/or low temperature.

“C16-WIFI” IOT-enabled Alarm

Schematic

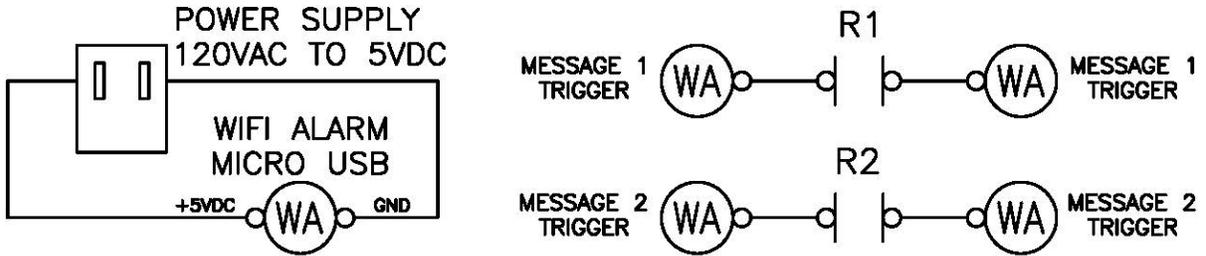

Connections

