




## **“C16” Land-line Auto Dialer**

### Standard Features & Benefits

- Primary voltage: 115VAC, Secondary voltage: 12VDC
- Remote notification of alarm situation via phone call \*
- Up to 20 second alarm message
- Custom record messages made on-site via built-in microphone
- No third-party service contract required
- Support for battery backup (battery not included)
- Program up to 5 contacts
- Requires hard-wired phone line (RJ11 plug inside unit)

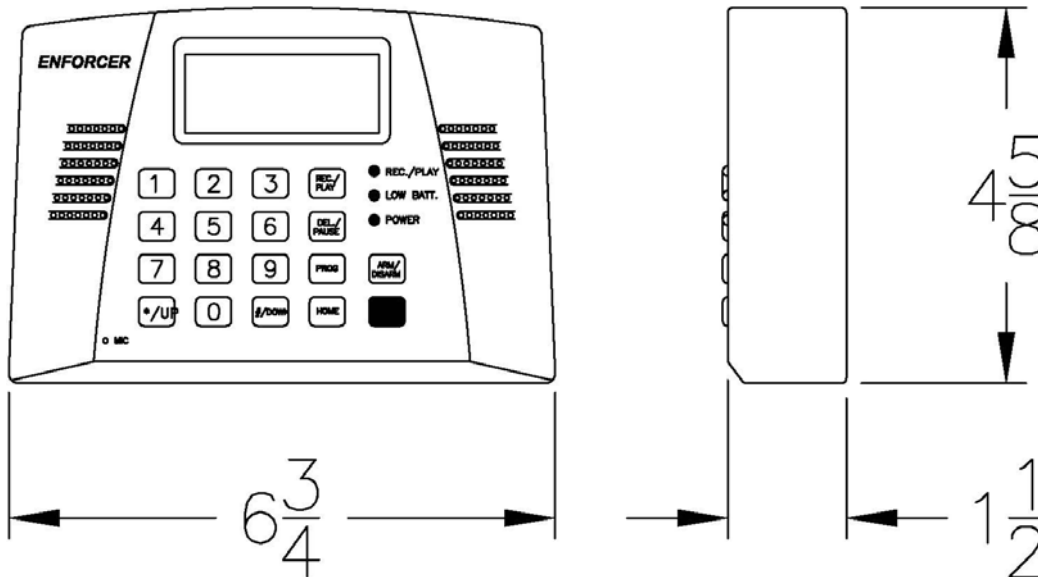


\* Note: Support for up to 2 input circuits. Consult the factory for available configurations. Standard configuration assumes high-water-alarm only.



# AUTO-DIALER / TELEMETRY

## “C16” Land-line Auto Dialer

### Schematic

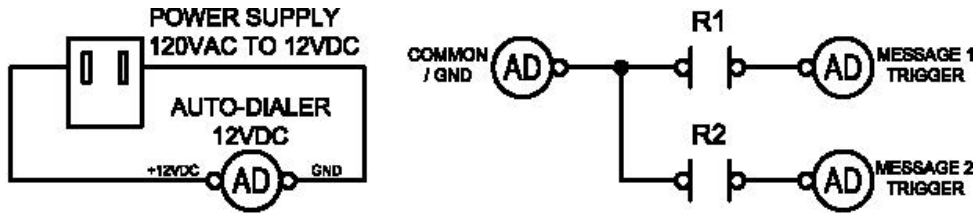

### Connections

